

TRANSFORMADORES CON CONVERTIDOR DE MEDIDA INTEGRADO (ENVOLVENTE DE PLÁSTICO)



MODELO	PRIMARIO PASANTE		
	TC20CV	TC30CV	TC40CV
Barra	20x5	30x10	40x10
Cable	Ø16	Ø22	Ø30
Precisión	1	1	1
I _{pn} (A)	Salida (mA)	Salida (mA)	Salida (mA)
10; 12,5; 15 o 20	4-20		
20; 25; 30 o 40	4-20	4-20	
50; 60; 75 o 100	4-20	4-20	4-20
125; 150; 200 o 250	4-20	4-20	4-20
300; 400; 500 o 600		4-20	4-20

DATOS TÉCNICOS:


Margen de funcionamiento: 10-120%

Impedancia máxima de carga: 600 Ohms (24 V)

Frecuencia: 50-60 Hz

Clase: 0,5

DIMENSIONES

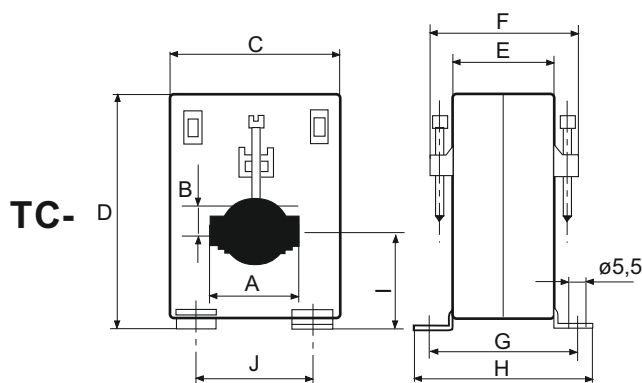

Esquema de conexión


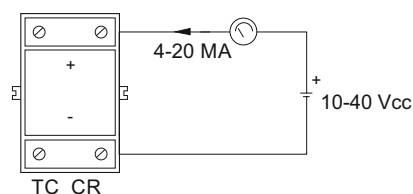


Figura 1




Figura 2




Figura 3

MODELOS	A B	C	D	E	F	G	H	I	J
TC20CR	Figura 1	56	74	33	48,5	48,5	60	32,5	37
TC30CR	Figura 2	60	79	36	51,5	51,5	63	34,5	41
TC40CR	Figura 3	71	96	45,5	61	61	72,5	44,5	52

Dimensiones en mm.