

TRANSFORMADORES DE MEDIDA (ENCAPSULADOS EN RESINA)




PRIMARIO BOBINADO				
MODELO	TU3R		TU50R	
Precisión	0,5	1	0,5	1
I _{pn} (A)	VA		VA	
5				
10				
15				
20				
25				
30				
40				
50	15	25		
60	15	25		
75	15	25		
100	15	25		
125	15	25		
150	15	25		
200	15	25		
250	15	25		
300	15	25		
400	15	25	15	25
500	15	25	15	25
600	15	25	15	25
750			15	25
800			15	25

DIMENSIONES

TU3R - TU50R

Soporte de fijación

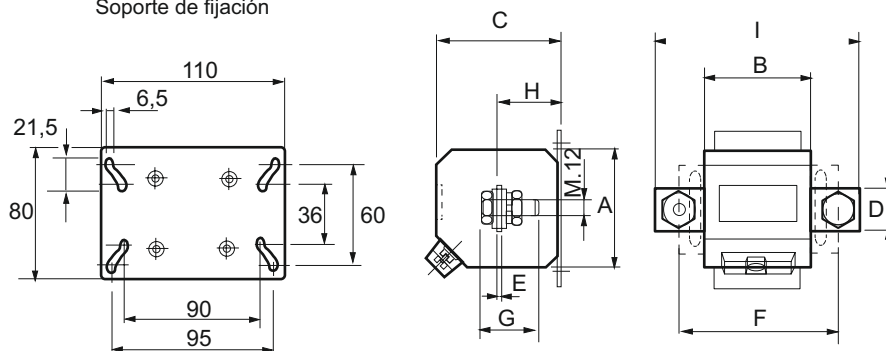

MODELOS	Relación	A	B	C	D	E	F	G	H	I
TU3R	50/5-300/5	80	73,5	96	30	5	110	38	42	140
TU3R	400/5-600/5	80	73,5	101	30	10	110	48	47	140
TU50R	400/5-800/5	100	73,5	100	50	10	135	48	50	175

Dimensiones en mm.